

Cold Weather Procedures

For


Air Pressure Testing

With

PEX Piping

Air pressure testing of PEX piping plumbing systems will be allowed only during the time period of November 1 – March 31 and under the following conditions:

- Air testing pressures shall be a minimum of 40 psi and a maximum of 80 psi.
- In order to protect all the fittings, air testing pressures should be applied on the same day as the requested inspection and released immediately afterwards.
- All conditions and/or criteria contained in this policy may be modified at the sole discretion of the Department of Buildings & Codes.

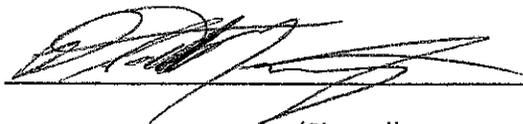

(Signed)

11/18/14

(Date)